


PUBLIC WORKS & UTILITIES ENGINEERING & DESIGN STANDARDS

A-3 TRUE PINE CONE FINIAL (BLACK)
BY CREATIVE SIGN DESIGNS
OR CITY APPROVED EQUAL.
2.75" W x 4.25" H (TYP.)

PLACE CITY LOGO HERE

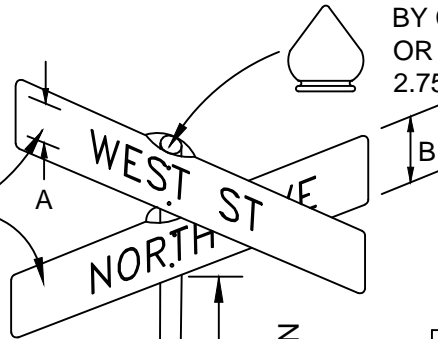

ITEM	ALL OTHER (LOCAL, COLLECTOR)	ARTRIAL (MAJOR)
A	6"	6"
B	9"	12"


CLEARANCE TO
BOTTOM OF MAIN SIGN
SHALL BE 7"
(i.e. - STOP SIGN)

SB-33 DECORATIVE BASE
(BLACK) SLIPPED OVER PIPE
BY CREATIVE SIGN DESIGNS
OR CITY APPROVED EQUAL.



3" ALUMINUM GALVANIZED PIPE.
BLACK POWDER COATED.

FINISH GRADE

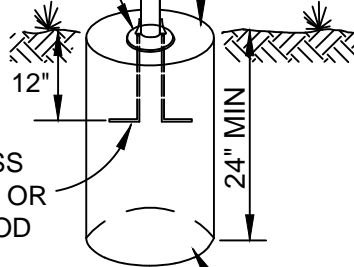

7/16 STAINLESS
STEEL J BOLT OR
THREADED ROD

SIGN POST CUSTOM MADE OR
PURCHASED FROM SPENCER
FABRICATIONS

NOTES:

1. ALUMINUM PLATES - MINIMUM THICKNESS .060 INCHES, DIE CUT ALCOA ALLOY 6061 -T6, OR EQUAL. WHITE RETROREFLECTIVE LETTERS WITH GREEN RETROREFLECTIVE BACKGROUND TO MEET STANDARDS OF SECTION 633.06 FP-79 FOR TYPE 3A SHEET REFLECTIVE MATERIAL. CITY LOGO TO BE PURCHASED FROM THE CITY.
2. SIGNS SHALL BE BOLTED USING TWO $\frac{5}{16}$ STAINLESS STEEL THREADED CARRIAGE BOLTS ON POST AND TWO RIVETS ON EACH END OF STREET SIGN BLADE.
3. CITY PROJECTS: BACK OF SIGNS SHALL BE PAINTED BLACK.

BASE
2500 P.S.I. CONCRETE
12" DIAMETER



CITY OF ALTAMONTE SPRINGS
950 CALABRIA DRIVE
ALTAMONTE SPRINGS, FLORIDA 32714

STREET NAME MARKERS - MINIMUM STANDARDS

RD010-2

ISSUED 2017

REVISED 03/08/2017 BY DJB