



PUBLIC WORKS & UTILITIES ENGINEERING & DESIGN STANDARDS

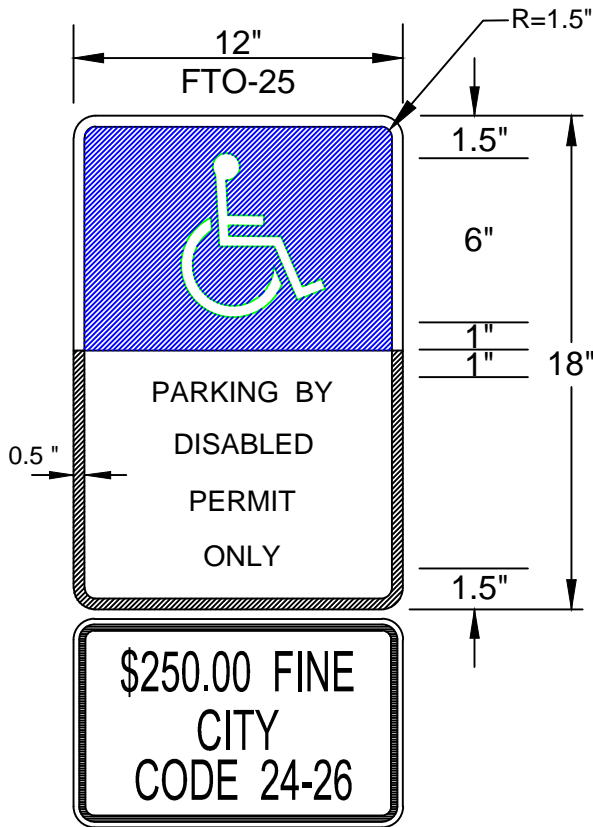

NOTES: (DISABLED SIGN ONLY)

1. ALL LETTERS SHALL BE BLACK AND 1" IN HEIGHT AND SPACED 1" APART. LETTERS ARE TO BE SERIES "B" OR "C", PER MUTCD.
2. TOP PORTION OF SIGN SHALL BE BLUE BACKGROUND WITH WHITE LEGEND AND BORDER.
3. BOTTOM PORTION OF SIGN SHALL BE WHITE BACKGROUND WITH BLACK BORDER.
4. ONE SIGN REQUIRED FOR EACH PARKING SPACE.
5. THE MINIMUM HEIGHT, MEASURED VERTICALLY FROM THE BOTTOM OF THE ACCESSIBLE SIGN TO THE TOP OF THE CURB, OR IN THE ABSENCE OF CURB, MEASURED VERTICALLY FROM THE BOTTOM OF THE SIGN TO THE ELEVATION OF THE NEAR EDGE OF THE TRAVELED WAY SHALL BE 7 FEET.
6. SIGNS SHALL BE HIGH INTENSITY RETROREFLECTIVE.

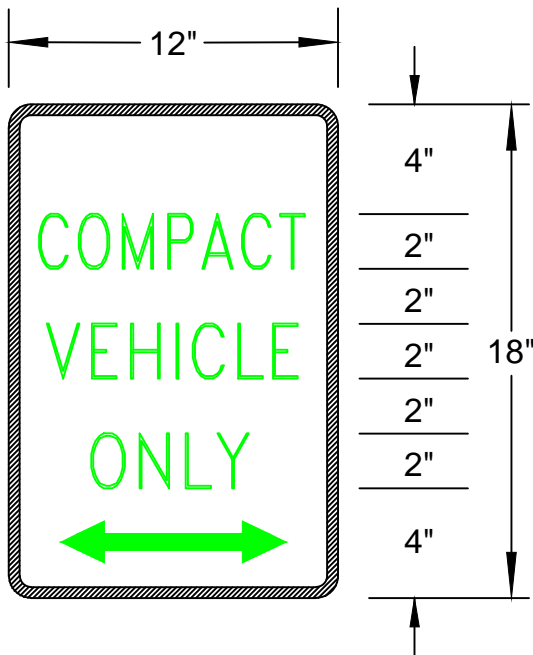

NOTES: (COMPACT PARKING SIGN ONLY)

1. SIGNS SHALL HAVE A WHITE BACKGROUND WITH GREEN LETTERS AND BORDER.
2. SERIES OF COMPACT PARKING SPACES SHALL BE IDENTIFIED BY A SIGN IN THE CENTER AND ON EACH END. GREEN ARROWS SHALL BE USED AS NEEDED FOR CLARIFICATION.
3. THE MINIMUM HEIGHT, MEASURED VERTICALLY FROM THE BOTTOM OF THE SIGN TO THE TOP OF THE CURB, OR IN THE ABSENCE OF CURB, MEASURED VERTICALLY FROM THE BOTTOM OF THE SIGN TO THE ELEVATION OF THE NEAR EDGE OF THE TRAVELED WAY SHALL BE 7 FEET.
4. SIGNS SHALL BE HIGH INTENSITY RETROREFLECTIVE.



CITY OF ALTAMONTE SPRINGS
950 CALABRIA DRIVE
ALTAMONTE SPRINGS, FLORIDA 32714

RESERVED PARKING SIGNAGE

MI007-2A

ISSUED 2017

REVISED 03/01/2017 BY DJB