


# PUBLIC WORKS & UTILITIES ENGINEERING & DESIGN STANDARDS



## NOTES:

1. ALL LETTERS SHALL BE BLACK AND 1" IN HEIGHT AND SPACED 1" APART. LETTERS ARE TO BE SERIES "B" OR "C", PER MUTCD.
2. TOP PORTION OF SIGN SHALL BE BLUE BACKGROUND WITH WHITE LEGEND AND BORDER.
3. BOTTOM PORTION OF SIGN SHALL BE WHITE BACKGROUND WITH BLACK BORDER.
4. ONE SIGN REQUIRED FOR EACH PARKING SPACE.
5. THE MINIMUM HEIGHT, MEASURED VERTICALLY FROM THE BOTTOM OF THE ACCESSIBLE SIGN TO THE TOP OF THE CURB, OR IN THE ABSENCE OF CURB, MEASURED VERTICALLY FROM THE BOTTOM OF THE SIGN TO THE ELEVATION OF THE NEAR EDGE OF THE TRAVELED WAY SHALL BE 7 FEET.
6. SIGNS SHALL BE HIGH INTENSITY RETROREFLECTIVE.
7. OPTION: THE HEIGHT TO THE BOTTOM OF THE TWO (2) SECONDARY SIGNS MOUNTED BELOW ANOTHER SIGN MAY BE SIX FEET (6').

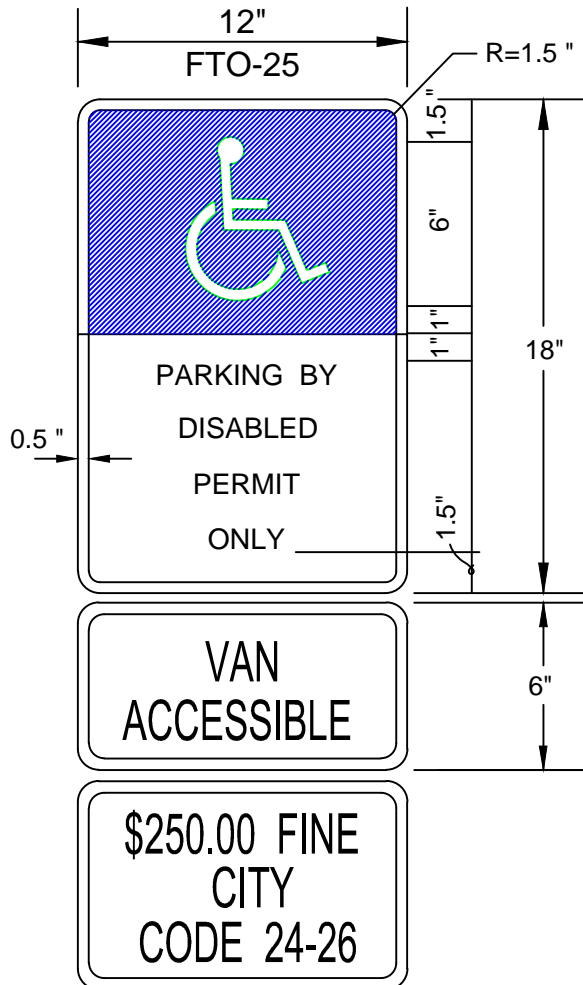

CITY OF ALTAMONTE SPRINGS  
950 CALABRIA DRIVE  
ALTAMONTE SPRINGS, FLORIDA 32714

## RESERVED PARKING SIGNAGE

**MI007-2B**

ISSUED 2017

REVISED 03/01/2017 BY DJB